

# 部门

Grupo Ortiz 是 最 下 的 高 性 和 用 性 的 代 表  
用 优 合 物 在 载 和

## 最大度与用性

我们的 提供卓越的抗 损和抗 解性能 是 业和  
工业应用的 需 定的长 可 性



产品: - - - - - 色


100% 提供多种规格、厚度和色。单色、可定制。适用于和机工。



| 规格        |                              |                             |                             |                           |                           |                           |                           |                          |                          |                         |
|-----------|------------------------------|-----------------------------|-----------------------------|---------------------------|---------------------------|---------------------------|---------------------------|--------------------------|--------------------------|-------------------------|
| 规格        | 0.12 in                      | 0.16 in                     | 0.24 in                     | 0.31 in                   | 0.39 in                   | 0.43 in                   | 0.51 in                   | 0.63 in                  | 0.75 in                  | 0.98 in                 |
| 每卷产量 ±10% | 124,015.75 in<br>3,444.87 yd | 77,952.76 in<br>2,165.34 yd | 36,969.33 in<br>1,027.51 yd | 24,685.99 in<br>685.87 yd | 20,078.43 in<br>558.38 yd | 15,354.33 in<br>426.63 yd | 10,590.49 in<br>294.07 yd | 8,031.50 in<br>223.17 yd | 5,826.76 in<br>161.93 yd | 3,267.71 in<br>90.77 yd |
| 每包单位      | 3                            | 3                           | 1                           | 1                         | 1                         | 1                         | 1                         | 1                        | 1                        | 1                       |
| 重量 ±10%   | 39.68 lb                     | 39.68 lb                    | 46.30 lb                    | 52.91 lb                  | 55.12 lb                  | 55.12 lb                  | 68.34 lb                  | 79.37 lb                 | 99.21 lb                 | 112.44 lb               |
| 抗拉度 ±10%  | 242.51 lb/f                  | 374.79 lb/f                 | 859.80 lb/f                 | 1,543.24 lb/f             | 1,763.70 lb/f             | 2,204.62 lb/f             | 3,086.47 lb/f             | 4,409.24 lb/f            | 5,511.56 lb/f            | 6,392.40 lb/f           |

规格从 0.12 in / 0.003 yd 到 0.98 in / 0.027 yd 可 3 4

有 UV 过器的适用于业高延长使用  
适用于大的度和用性非常适合和  
和

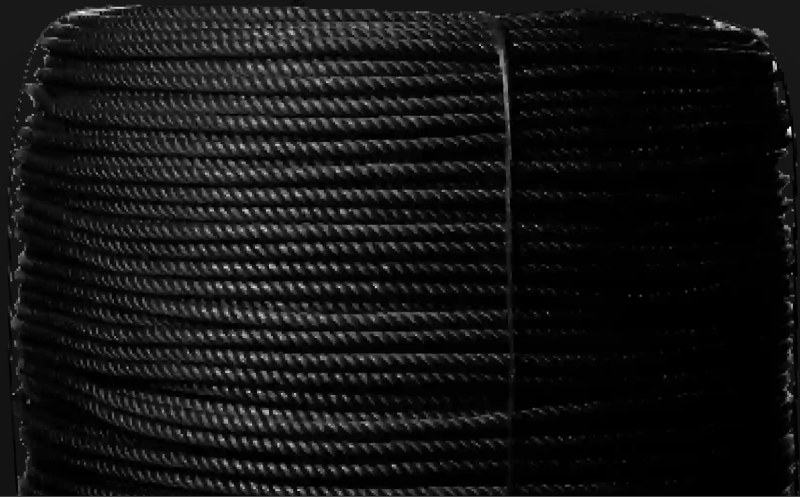

| 规格        |                           |                          |                        |                        |
|-----------|---------------------------|--------------------------|------------------------|------------------------|
| 规格        | 0.12 in                   | 0.16 in                  | 0.24 in                | 0.31 in                |
| 每卷产量 ±10% | 127,559.06 in 3,544.30 yd | 70,866.14 in 1,968.50 yd | 33,267.72 in 924.30 yd | 25,393.70 in 705.88 yd |
| 每包单位      | 3                         | 3                        | 1                      | 1                      |
| 重量 ±10%   | 39.68 lb                  | 39.68 lb                 | 46.30 lb               | 52.91 lb               |
| 抗拉度 ±10%  | 231.49 lb/f               | 352.74 lb/f              | 661.39 lb/f            | 1,212.54 lb/f          |

规格从 0.12 in / 0.003 yd 到 0.31 in / 0.009 yd

我们提供多种规格、厚度和颜色的单色绳，可根据您的要求定制，适用于工业、农业、供应中心和码头。




| 规格        |                        |                        |                        |                        |                        |                        |                        |                       |
|-----------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|-----------------------|
| 规格        | 0.24 in                | 0.31 in                | 0.39 in                | 0.43 in                | 0.51 in                | 0.63 in                | 0.75 in                | 0.98 in               |
| 每卷产量 ±10% | 33,267.72 in 924.30 yd | 25,393.70 in 705.88 yd | 19,881.89 in 552.87 yd | 17,716.54 in 492.12 yd | 13,779.53 in 382.76 yd | 11,417.32 in 317.15 yd | 10,393.70 in 288.71 yd | 6,850.39 in 190.28 yd |
| 每包单位      | 1                      | 1                      | 1                      | 1                      | 1                      | 1                      | 1                      | 1                     |
| 重量 ±10%   | 26.46 lb               | 52.91 lb               | 52.91 lb               | 52.91 lb               | 52.91 lb               | 79.37 lb               | 99.21 lb               | 112.44 lb             |
| 抗拉强度 ±10% | 661.39 lb/f            | 1,212.54 lb/f          | 1,322.77 lb/f          | 1,587.32 lb/f          | 1,763.70 lb/f          | 2,645.55 lb/f          | 3,968.31 lb/f          | 4,850.17 lb/f         |

规格从 0.24 in / 0.007 yd 到 0.98 in / 0.027 yd



有 UV 过器的适用于高活动延长其使用UV  
过器确保用性和更的抗性

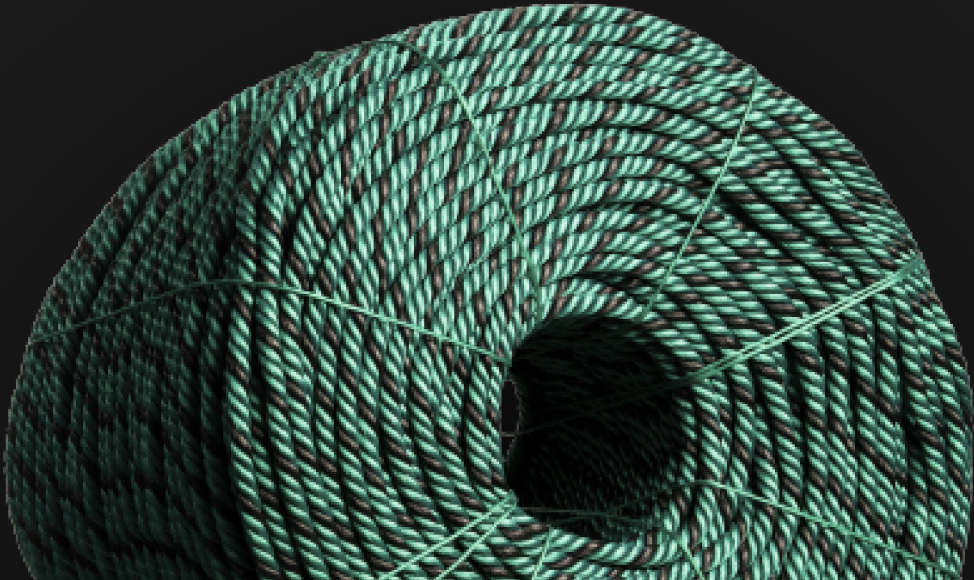


| 规格        |                          |                        |                        |                        |                        |                        |                        |                        |
|-----------|--------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|
| 规格        | 0.16 in                  | 0.24 in                | 0.31 in                | 0.39 in                | 0.43 in                | 0.51 in                | 0.63 in                | 0.75 in                |
| 每卷产量 ±10% | 77,952.76 in 2,165.34 yd | 32,283.46 in 896.76 yd | 24,606.30 in 683.51 yd | 19,291.30 in 535.87 yd | 15,354.33 in 426.63 yd | 13,464.57 in 373.85 yd | 11,417.32 in 317.15 yd | 10,590.49 in 294.07 yd |
| 每包单位      | 1                        | 1                      | 1                      | 1                      | 1                      | 1                      | 1                      | 1                      |
| 重量 ±10%   | 39.68 lb                 | 52.91 lb               | 52.91 lb               | 52.91 lb               | 55.12 lb               | 68.34 lb               | 79.37 lb               | 99.21 lb               |
| 抗拉度 ±10%  | 385.81 lb/f              | 963.42 lb/f            | 1,322.77 lb/f          | 1,792.08 lb/f          | 2,248.71 lb/f          | 3,113.12 lb/f          | 4,299.00 lb/f          | 5,291.09 lb/f          |

规格从 0.16 in / 0.004 yd 到 0.75 in / 0.021 yd

# 色

提供多种规格、厚度和色、单色、符合、可、定、刚性、高度和性能、便、非常适合、定轻重负载、

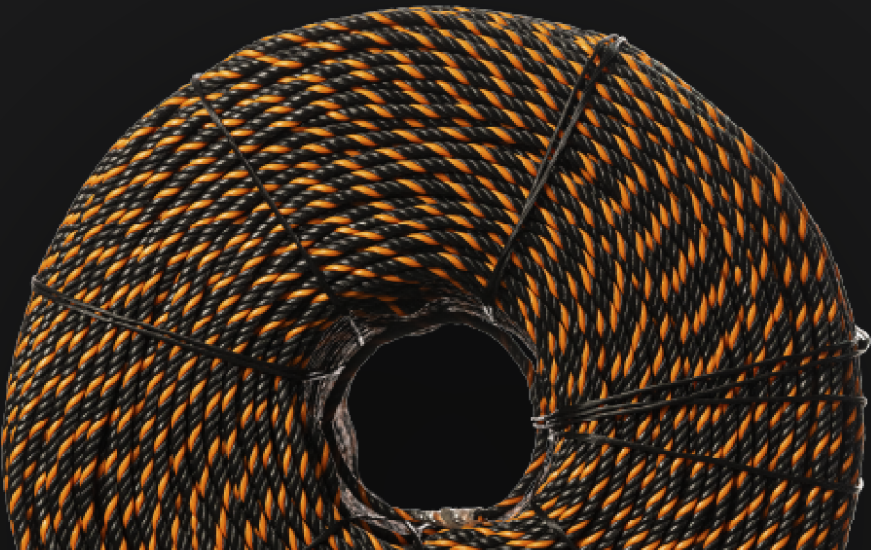

| 规格        |                        |                        |                        |                        |                        |                        |                        |                      |
|-----------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|----------------------|
| 规格        | 0.24 in                | 0.31 in                | 0.39 in                | 0.47 in                | 0.51 in                | 0.63 in                | 0.75 in                | 0.98 in              |
| 每卷产量 ±10% | 33,267.72 in 924.30 yd | 25,393.70 in 705.88 yd | 17,716.54 in 492.12 yd | 13,779.53 in 382.76 yd | 15,354.33 in 426.63 yd | 11,417.32 in 317.15 yd | 10,393.70 in 288.71 yd | 6,850.39 in 90.28 yd |
| 每包单位      | 1                      | 1                      | 1                      | 1                      | 1                      | 1                      | 1                      | 1                    |
| 重量 ±10%   | 46.30 lb               | 52.91 lb               | 52.91 lb               | 52.91 lb               | 55.12 lb               | 79.37 lb               | 99.21 lb               | 112.44 lb            |
| 抗拉度 ±10%  | 749.57 lb/f            | 1,234.59 lb/f          | 1,433.00 lb/f          | 1,719.60 lb/f          | 1,984.16 lb/f          | 2,976.24 lb/f          | 4,232.87 lb/f          | 5,026.53 lb/f        |

6、8、10、11、13、16、19 和 25 的规格、3 和 4